





SeleKt

SELECTION AND DEMOLITION CLAMP




- Compact and simple design, easy servicing
- Available with 2 types of jaws: Demolition and Sorting
- Replaceable cutting edges made of HB 400 steel grant maximum durability
- Uses WELDOX high-tensile steel for the manufacturing of structural parts of demolition grapples

THE BEST SELECTION

Demolition grapples are conceived to perform small demolitions and to separate the resulting materials, waste...

Easy to use and versatile, the demolition grab for mini excavator is an increasingly popular tool, even on waste dumps and recycling sites.

TECHNICAL FEATURES

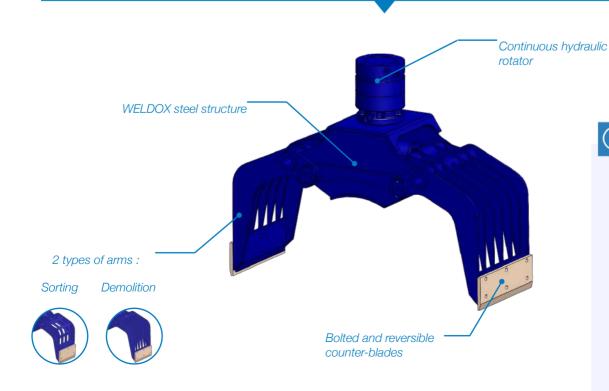





Klac industrie S.A.

288, rue des Saules Z.A Orléans Sologne Saint-Cyr-En-Val 45075 Orléans Cedex 2 France

Tél. (33) 2 38 49 82 82

Fax (33) 2 38 49 82 83

contact@klac-industrie.com

www.klac-industrie.com



SORTING

- Perforated arms.
- Bolt-on counterblades.

Suggested applications precise sorting of materials.

DEMOLICION

- Arms with metal ribs.
- Bolt-on counterblades.

Suggested applications Light demolition and sorting



Il models have a double-acting Anydraulic cylinder with a non-return valve.

The blades of the clamshells touch at the end of the closing phase, so as to allow a very precise and firm grip on the objects.

A sorting and demolition grapple is supplied as standard with a hydraulic rotator (no hydraulic pressure problems, no maintenance work, no adjustment of the excavator's hydraulic system).

AVAILABLE WITH



KLAC SYSTEM



KLAC +



AK ALTERNATIK



THE RANGE SELEKT Selection clamp

Model C / 0									
(Mxs of 0,8 to	1,2t)								

Model C / 0 (Mxs of 1,2 to 2t)

Model D / 1

(Mxs of 2 to 2,8t)

Model D / 1 (Mxs of 3 to 3,5t)

Model E / 2 (Mxs of 3 to 5t)

Model F / 3 (Mxs of 5 to 6,5t)

Model F / 3 (Mxs of 6,5 to 9t)

Model G (Mxs of 9 to 12t)

Model H (Mxs of 12 to 16t)

(Mxs of 16 to 22t)

Weight kq	Max load daN	Max bar	A mm	B mm	C mm	D mm	E	F mm	Jaws	Closing force kN
98	200	160	700	560	370	535	545	695	SORTING	5
120	500	160	700	560	370	550	560	710	SORTING	10
135	500	200	870	600	370	600	650	850	SORTING	10
258	900	300	1 050	780	425	705	760	950	DEM	25
380	900	300	1 260	830	530	820	880	1 100	DEM	25
432	900	300	1 260	830	530	820	880	1 070	DEM	25
627	1 300	300	1 600	1 070	600	1 010	1 045	1 250	DEM	25
650	1 500	300	1 700	1 075	700	1 100	1 200	1 400	SORTING / DEM	25
850	2 500	300	1 800	1 240	800	1 255	1 395	1 580	SORTING / DEM	25
1 150	5 000	300	1 850	1 260	820	1 310	1 380	1 680	SORTING / DEM	40

